




# TD3108C Touch Controller

Commercial-Grade

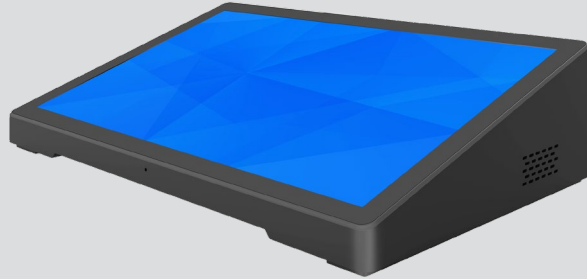

## One Platform, Endless Possibilities

An Ecosystem of products specifically designed for professionals.



### Professional-Grade

CE labs Touch Controller, with their durable construction and ultra-sleek design, are ideal for creating an interactive experience that engages and entertains.



### APPS

CE Labs Touch Controllers are compatible with hundreds of Android apps. With endless possibilities we have a business solution right for you.



### 3 Year Warranty

Our Touch displays are built for professionals and come superior customer support and a standard with a 3 Year warranty.

## PRODUCT OVERVIEW

The CE Labs TD-Controller Series is intended to transform collaboration spaces and provide a seamless meeting experience. The TD-C Series, powered by Android, outperforms the competition with a best-in-class 10-point multi-touch IPS display, integrated Wi-Fi, and optional Power-over-Ethernet (POE). Available in Black or White the TD-Controller series is ideal for controlling video conferencing or meeting room automation. With the addition of one of our Android conference room control apps, you can create the ideal huddle room or virtual meeting space.

## FEATURES

24/7 Performance

Responsive Multi-Point touchscreen

Gigabit ethernet and Wi-Fi for superior connectivity

# SPECIFICATIONS

MODEL: TD3108C

## FEATURES

Quadcore Cortex , RAM 2GB

16GB Flash storage, RAM 2GB

Android 8.1

24/7 operational hours

8.0 Inch IPS LCD

Multipoint capacitive touch screen

1280x800 Resolution (16:10 aspect ratio)

Viewing angle 85/85/85/85 (L/R/U/D)

“Kiosk operation mode” that is auto-starting with Android OS and settings menu hidden and locked

WiFi 802.11b/g/n, 10M/100M, Bluetooth 4.0

Built-in speakers, 2x2W

Brightness: 250cd/m2 (nit)

Contrast ratio: 800:1

## MEDIA FORMATS

Video: MPEG-1,MPEG-2,MPEG-4,H.265,H.264,VC-1,VP8, etc., support up to 4K

Audio: MP3/WMA/AAC etc.

Photo: jpeg

## NETWORK

WiFi 802.11b/g/n,

Bluetooth 4.0

Ethernet 100M/1000M/1000M

## I/O PORTS

DC Jack 12V/1.5A

RJ45 Ethernet 10M/100M/1000M

Recovery button

Power Button

SD card slot

USB host 2.0, USB for serial(RS232 format), Micro USB OTG

3.5mm Earphone Internal Microphone

## ACCESSORIES

Power Adapter, 100-240Vac 50/60Hz, 12Vdc/1500mA, EL VI, UL

Quick Start Guide

## MISCELLANEOUS

Dimensions (L) 401.8mm, (W) 252.9mm, (H) 30.2mm

Weight 1.32 kg

Operating Temp & Humidity 0-40°C, Humidity 40C, 5-85% @

Attractive and rugged black enclosure standard. Available in white.

## OPTIONAL FEATURES (Add-On)

Optional NFC 13.56MHz, ISO14443A/ISO14443B

Optional Camera 2.0MP

Custom mounting options (Inquire)

WARRANTY: \*3 year warranty, parts and labor.

Learn more about CE Labs at [www.celabs.com](http://www.celabs.com).

### United States

1-800-767-6189

sales@celabs.com

CE Labs, LLC reserves the right to change or update without notice. CE Labs, the CE Labs logo and CESync are registered trademarks of CE Labs, LLC. All other trademarks are the property of their respective owner. 2021 CE Labs, LLC. All rights reserved.

